


## OTTOVAC HEAVY LIFTING MADE EASY

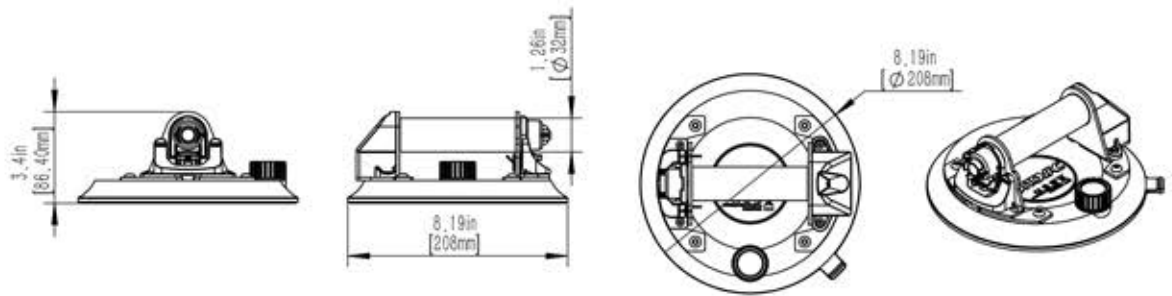

### TECHNICAL SPECIFICATIONS

Electric vacuum lifting device	OTTOVAC
Model	OTTOVAC-V1(OV-V1)
Batteries	Alkaline AA 1.5 V (x4)
Working voltage	6 V
Rated power	6 W
Working cycle	1500 ON-OFF cycles of 10 seconds
Service life	> 10000 times, > 800h
Rated air flow	4 l/min
Maximum vacuum rate	-0.7 bar (-70 kPa)
Maximum lifting capacity	200 kg (440lbs)
Dimensions	200x200x90 mm
Net weight (with battery)	1.2 kg (2.6 lbs)
Working temperature	0-60°C (32-140°F)

### Estimated maximum lifting forces as tested on different materials

	Perpendicular holding force	Parallel holding force
Glass	200 kg/440 lbs	200 kg/440 lbs
Ceramic tile	200 kg/440 lbs	200 kg/440 lbs

**Notice:** When the vacuum level drops below .055 BAR / 7.9 PSI, the OTTOVAC will automatically start the pump (when the pump is switched on,) thereby achieving the pressure required for use.

Based on product information at time of publication, environmental conditions can affect the product performance and longevity. Consult the product manual on GRABO.com or contact a sales representative for more information.

Always ensure OTTOVAC tools AA batteries have sufficient power for intended usage.

#### GRABO HQ:

Eastern Commerce Center  
6000 S Eastern Ave  
Unit 9E  
Las Vegas, Nevada, 89119

Info@GRABO.com

www.GRABO.com

#### Main Office:

+1 (844) 430-0510

#### Help & Warranty:

+1 (702) 718-2433